Mapping a Drive on BMIISI (Mac)

How to map a drive to the BMIISI RES server (bmiisi.chmcres.cchmc.org) in MacOS.




Download a PDF copy of this document: RESITHUB-MappingBMIISIMac-230323-1446-680.pdf




Getting Access to a Drive

- After being granted access to a drive, you must restart your computer before mapping a drive to it.
 If you are denied access to a drive, please restart your computer and try mapping it again.
- Authorizers can grant access to users via the Permissions Manager.
 - Authorizers do not automatically have access, but they can grant access to themselves.
- The BMIISI Permissions Manager can be accessed here: https://dp.research.cchmc.org/.
- Instructions on how to use Permissions Manager are here: https://confluence.research.cchmc.org/x /dgNcAw.



1. Open Finder, click Go from the Menu Bar, and choose Connect to Server.




2. In the "Server Address" field type smb://bmiisi.chmcres.cchmc.org/SHARE_NAME. In this example we are accessing the share "sasdata". Then click the Connect button:



3. If the login screen appears, enter your User ID with the "chmcres\" prefix. In this example, Jdoe2 is used for the User ID, so chmcres\Jdoe2 is entered. Then enter your password and click the Connect button:




You must include the "chmcres\" prefix before your CCHMC User ID when connecting to a BMIISI drive. Your login will fail if you do not include it.

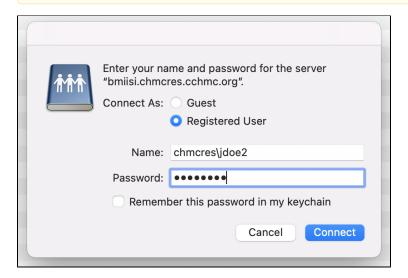


4. When the confirmation window appears, click the Connect button again.



5. The drive contents will display.

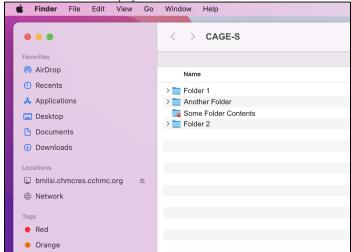

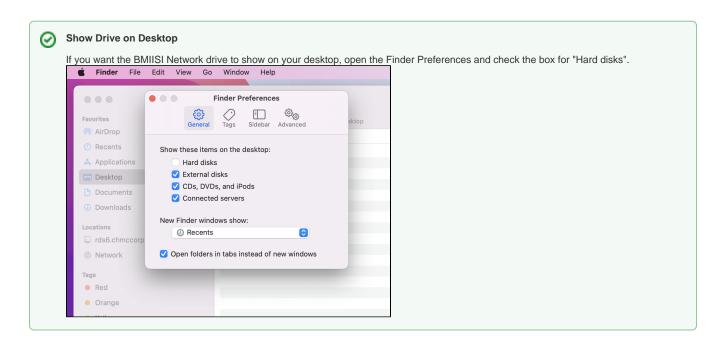

Getting additional help

If there are still any issues after reading these instructions and any help is still needed please email help-rds@bmi.cchmc.org for further assistance.