

Mapping a Drive on BMIISI (Mac)


How to map a drive to the BMIISI RES server (bmiisi.chmcred.cchmc.org) in OS X.

Download a PDF copy of this document: [RESITHUB-MappingBMIISIMac-050618-1322-11.pdf](#)


Getting Access to a Drive

- After being granted access to a drive, you must restart your computer before mapping a drive to it. If you are denied access to a drive, please restart your computer and try mapping it again.
- Authorizers can grant access to users via the Permissions Manager.
Authorizers do not automatically have access, but they can grant access to themselves.
- The BMIISI Permissions Manager can be accessed here: <https://dp.research.cchmc.org/>.
- Instructions on how to use Permissions Manager are here: <https://confluence.research.cchmc.org/x/dgNcAw>.


1. **Open Finder**, click **Go** from the Menu Bar, and choose **Connect to Server**.
2. In the "Server Address" field type **smb://bmiisi.chmcred.cchmc.org/SHARE_NAME**. In this example we are accessing the share "**bmi_smb_**". Then click the **Connect** button:

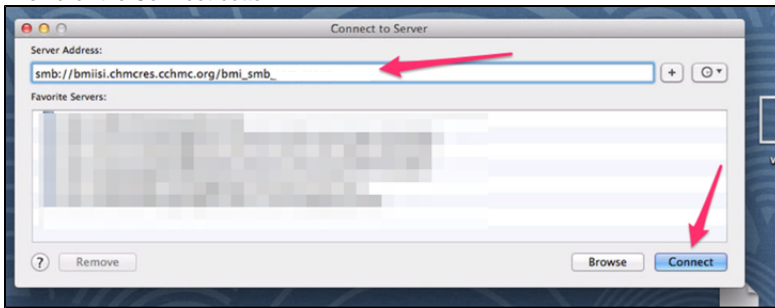

3. **Your User ID needs to be formatted as chmcred\XXXXXX**, where XXXXXX is your CHMC user id.
4. If the login screen appears, enter your User ID with the "**chmcred**" prefix. In this example, Jdoe2 is used for the User ID, so **chmcred\Jdoe2** is entered. Then enter your password and click the **Connect** button:

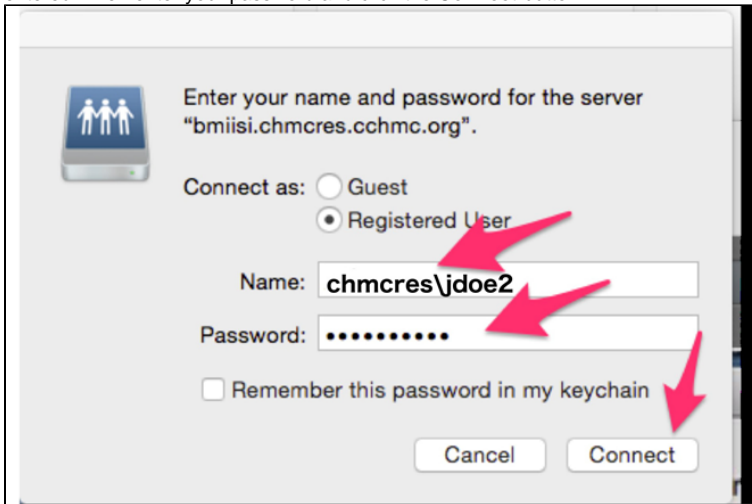

5. The share will now mount in Finder:

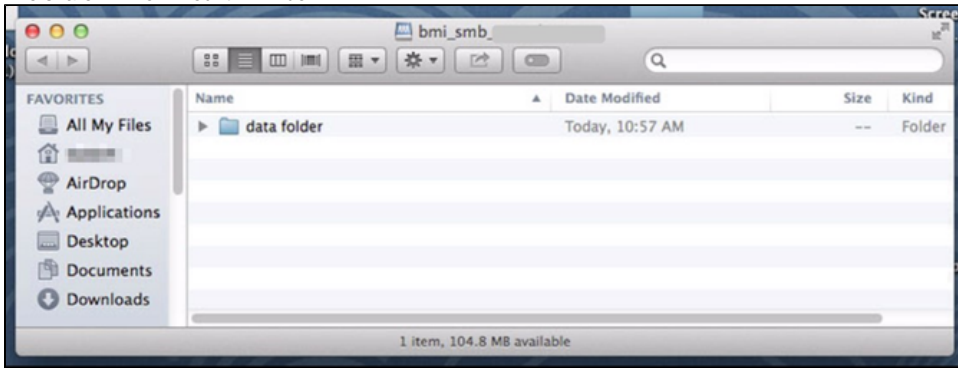

Getting additional help

If there are still any issues after reading these instructions and any help is still needed please email help-rds@bmi.cchmc.org for further assistance.